


# SHIPPING SCALES

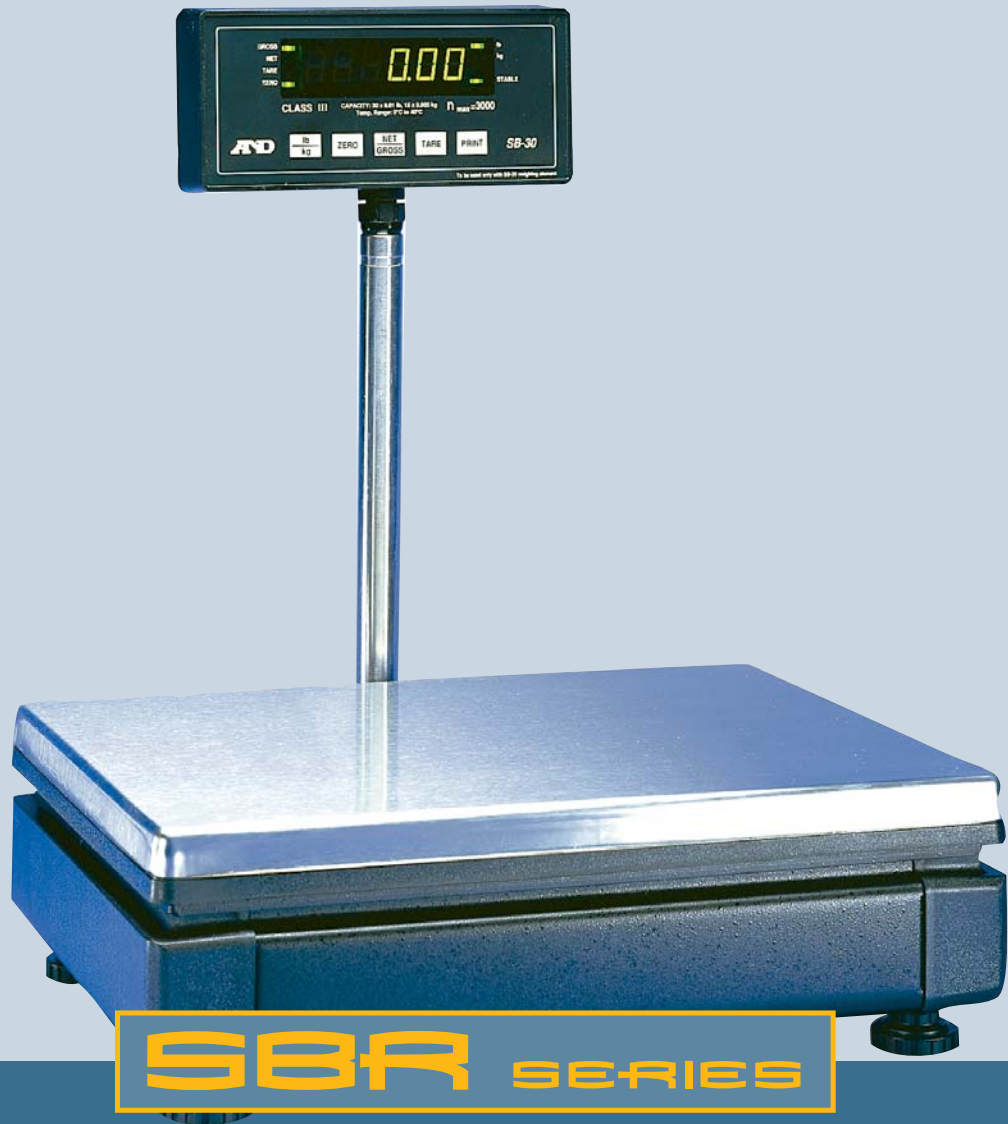

## FEATURES


- Excellent general use bench scale for point-of-sale, shipping, receiving, checking, stock control, and much more
- FREE shipping manifest software included with every SB-150
- Easy to set up and operate with stable, accurate, large display (integral with SB-150, external with SB-30/70)
- Stainless steel weighing pan for easy washdown (pan only)
- Optional rollers for SB-150
- Rugged heavy duty construction to take the punishment of industrial use and cleaning
- RS-232C Interface allows easy connection to a printer or computer for record keeping
- RS-232C interface compatible with all major point-of-sale software

## Ideal for Point-of-Sale and Shipping Manifest Systems

**SB-30 and SB-70 Models:**  
Standard with 6' Remote Displays.

**SB-30T and SB-70T Models:**  
Standard with Tower Mounted


**SB-150 Model:**  
Standard with Integral Mounted  
Display and Shipping Software

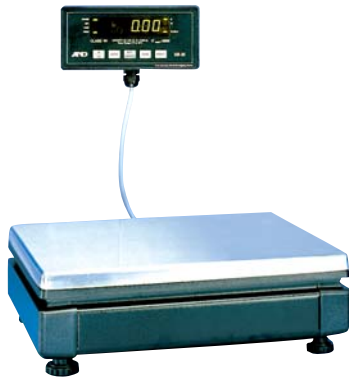


### SBR Series Specifications

Model	SB-30 – SB-30T	SB-70 – SB-70T	SB-150
Capacity	0-5 x 0.005 lb (0-2 x 0.002 kg) 5-30 x 0.02 lb (2-15 x 0.01 kg)	0-5 x 0.005 lb (0-2 x 0.002 kg) 5-70 x 0.02 lb (2-30 x 0.01 kg)	0-70 x 0.02 lb (0-30 x 0.01 kg) 70-150 x 0.05 lb (30-70 x 0.02 kg)
Legal-for-trade Capacity	0-30 x 0.01 lb (0-15 x 0.005 kg)	0-70 x 0.05 lb (0-30 x 0.02 kg)	0-150 x 0.05 lb (0-70 x 0.02 kg)
Display	6 digit, 0.6", 7 segment Green LED		
Operating Temperature	0° C ~ 40° C / 32° F ~ 104° F		
Shipping Weight	27.8 lb (12.6 kg)		
Platform Height	4.4" (112 mm)		
Pan Size (w x d)	10.2" (258 mm) x 13" (330 mm)		13" (330 mm) x 13" (330 mm)
Standard Accessories	Manual, AC adapter		Manual, AC adapter, shipping manifest software, PC interconnect cable (DB-9 to DB-9)

#### SB-30/30T/70/70T Dimensions:

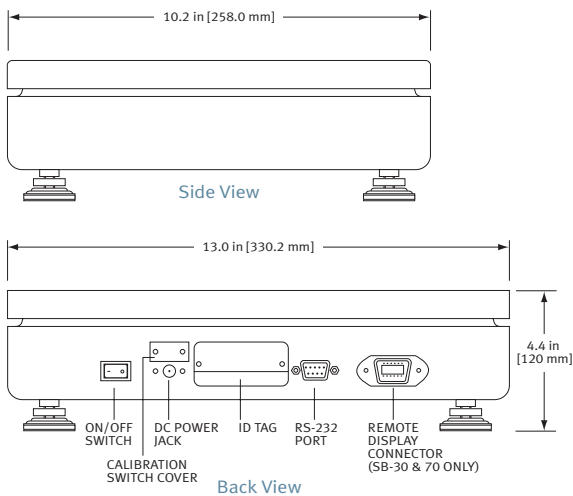

#### SB-150 Dimensions:

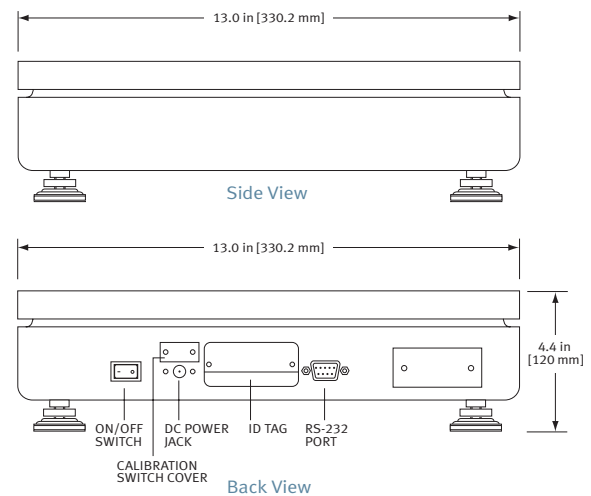

#### Options:

- AD-1191 Tape Printer (with time & date)
- SB-Roller (for SB-150)

Specifications are subject to change for improvement without notice

#### Display Panel:

